

STINGRAY ZXM5-96/245-275 W

STINGRAY ZXM5-275 W is one of ZNSHINE's newest panels. Versatile and adaptable, with power output ranging from 245 Wp up to 275 Wp, it is perfect for both groundmounted and commercial rooftop systems.

During the manufacturing process of this panel rigorous quality control meets the highest international standards: ISO 9001, 14001 and 18001.

Being approved by international testing institutions like TÜV Süd, TÜV Rheinland and BABT this panel comes with a 25-year output guarantee of 85 % power production and a 10-year manufacturer warranty.



RoHS (Restriction of Hazardous Substances):

Like all other panels from ZNSHINE SOLAR this fulfills all restrictions regarding the use of Lead, Mercury, Cadmium, Hexavalent Chromium, PBB or PBDE. Therefore, you can be sure about one thing: We take our green mission very responsibly.



25 years power output guarantee insured by the PowerGuard insurance

As one of the first manufacturers worldwide all modules from ZNSHINE SOLAR are equipped with the new PowerGuard insurance. This means you can rely on an




insured output of 92 % for 10 years and 85 % for 25 years. More security cannot be achieved by any other insurance!

The benefits of this panel:


- » High efficiency up to 16.14 %
- » Highly automated and vertically integrated manufacturing process
- » Output guarantee of 25 years
- » Europe-wide references
- » Bankable in Europe



Dimensions of PV module ZXM5-96/245-275 W

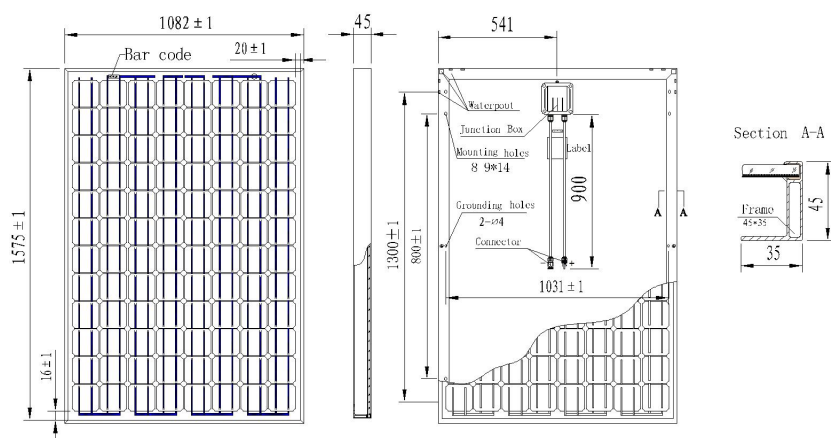

I-V Curves of PV module ZXM5-96/245-275 W

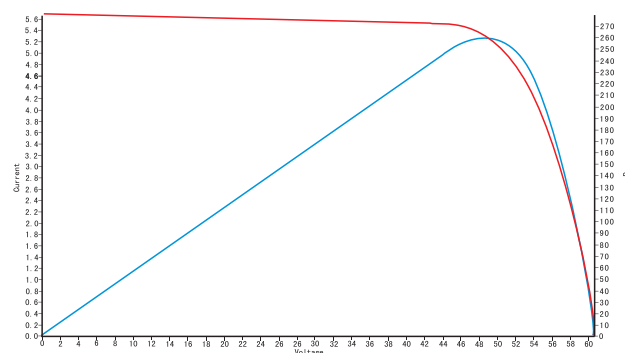

Electrical Data

	ZXM5-96-245/MS	ZXM5-96-250/MS	ZXM5-96-255/MS	ZXM5-96-260/MS	ZXM5-96-265/MS	ZXM5-96-270/MS	ZXM5-96-275/MS
Peak Power Watts- P_{MAX} (WP)	245	250	255	260	265	270	275
Power Output Tolerance- P_{MAX} (%)	0 ~ +3	0 ~ +3	0 ~ +3	0 ~ +3	0 ~ +3	0 ~ +3	0 ~ +3
Maximum Power Volatage V_{MAX} (V)	48.40	48.70	49.00	49.30	49.40	49.50	49.50
Maximum Power Current- I_{MPP} (A)	5.06	5.14	5.21	5.27	5.36	5.45	5.56
Open Circuit Voltage- V_{OC} (V)	59.50	59.60	59.80	60.00	60.10	60.40	60.60
Short Circuit Current- I_{SC} (A)	5.43	5.49	5.55	5.64	5.73	5.83	5.94
Module Efficiency η_m (%)	14.38	14.67	14.96	15.26	15.55	15.84	16.14

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000 W/m², Cell Temperature 25°C)

Mechanical Data

Solar cells	Mono 125 x 125 mm, (φ165)
Cells orientation	96 (8 x 12)
Module dimension	1575 x 1082 x 45 mm
Weight	22 kg
Glass	High transperancy, Low Iron, Tempered glass 3.2 mm
Frame	Anodized aluminium alloy
Junction box	IP 65
Cables/Connector	Diameter 4 mm ² , Length 900mm.
Number of Diodes	4

Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	45°C (±2°C)
Temperature Coefficient of P_{MPP}	- 0.42 %/°C
Temperature Coefficient of V_{OC}	- 0.29 %/°C
Temperature Coefficient of I_{SC}	0.04 %/°C

Working Conditions

Maximum System Voltage	DC1000V (TUV)
Operating Temperature	(-40 ~ +85) °C
Maximum Series Fuses	10 A
Front & rear static load test(eg: wind)	2400 pa
Front load test (eg: snow)	5400 pa

Warranty information

10 years workmanship warranty
 10 years warranty, 92 % power output
 25 years warranty, 85 % power output

Packaging information

Modules per box	24 pcs
Modules per pallet	48 pcs
Modules per 40" HQ container	672 pcs

ZNSHINE PV-Tech Co., Ltd

#1 Zhixi Industry Zone
 Jintan, Jiangsu Province, 213251
 People's Republic of China

Tel: +86 519 8244 9178
 Fax: +86 519 8244 9170
 Email: service@znshinesolar.com

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.
 Jan 2012 ZNSHINE Solar. All rights reserved.
 Specifications included in this datasheet are subject to change without notice.